


Current Sensors

CSC series

Special Features

- High accuracy
- Coil encapsulated in plastic case
- These sensors function as a secondaries of a current transformer
- Fixed lead spacing

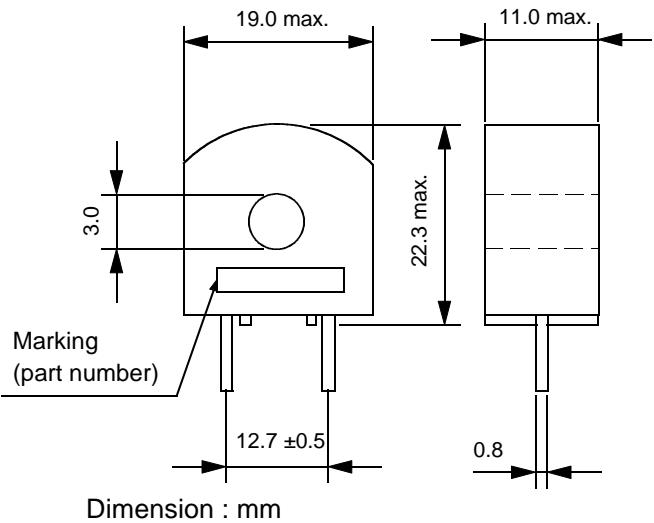

CSC Series						
Part Number	I Range (A)	L (mH)	Freq. Range (KHz)	DCR (Ω) Max.	Load Resis. (Ω)	Turns
CSC10	2 - 10	5	5 - 50	0.7	50	50
CSC20	2 - 20	20	5 - 50	1.4	100	100
CSC35	2 - 35	80	1 - 100	3.8	200	200

* All specifications are subject to change without notice.

* Varying load resistance will increase or decrease output voltage/Ampere in conductor. Effect is linear over a restricted operating range. Frequency response is also affected by varying the load resistance.